

Office Series LED Lighting

Products Catalogue

www.yuefeng.com



YUEFENG®

Zhongshan Yuefeng Lighting&Electrical Co.,Ltd
Add:Caoyi Industrial Zone,Guzhen Town,Zhongshan City,
Guangdong Province,China
Tel: +86-760-23388142 Fax: +86-760-23388143
E-mail: export@yuefeng.com led@yuefeng .com

YUEFENG®

Product catalogue

LED CEILING MOUNTED



LED 268B/C
PAGE 002



LED 268A
PAGE 004



LED 268H
PAGE 006



LED 228A
PAGE 008



LED 248
PAGE 010



LED 528A
PAGE 012



ZJ01
PAGE 014

LED PENDANT LIGHTING



LED 608 SERIES
PAGE 016



LED 658A
PAGE 018



LED 668
PAGE 020



LED 802
PAGE 022



LED 508
PAGE 024



LED 258
PAGE 026



LED 528B
PAGE 028



LED 638
PAGE 030



LED 648A
PAGE 032



LED 688
PAGE 034

LED TRI-PROOF FIXTURE



LED 608 SERIES
PAGE 036



LED 806
PAGE 038

LED TUBE



DG01
PAGE 040



DG03
PAGE 042



DG06
PAGE 044



208K/Q
PAGE 046

LED TROFFER LIGHT



DP05
PAGE 048



DP02
PAGE 050



DP03
PAGE 052



DP06
PAGE 054



DP07
PAGE 056



T8:MQ203,204,403,404
PAGE 058

LED PANEL LIGHT



PB08
PAGE 060



TD24
PAGE 062



TD23
PAGE 064

LED DOWNLIGHT



TD18
PAGE 066

Low carbon life, Priority choice



Design



R & D



Production



Administration

Company Introduction

Zhongshan Yuefeng Lighting & Electrical Co., Ltd., was founded in 1993. We are specializing in LED Flood light, LED panel light, LED fixture and Fluorescent fitting from recent years. With 20 years developing, Yuefeng now owns a great ability in Research and Development, professional manufacturing, superior quality controlling. It now has a modern plant of 35,000 square meters, including 8 professional manufacturing centers. In order to make sure that our products can be consistent, safe and reliable, we keep inspecting and monitoring on every stage from R&D to production.

Yuefeng has passed ISO9001:2008 quality management system certification, TUV、IEC、CCC、CE LVD、CE EMC、B2、A2、RoHS、SAA、CB、EMF and so on. Yuefeng now not only establishes a mature, healthy sales network in China, but also builds up a long term business relationship with various merchants from South Africa, Europe and South America, more than 80 countries.

Looking forward to the future, Yuefeng will keep going with an enterprise spirit "team work, developing, pragmatic, and improving". We as always hand in hand with various customers by offering high quality and high technology, reasonable price, excellent service, enjoy the future.



Low carbon life,priority choice

ENTERPRISE PRODUCTION WORKSHOP

Our business philosophy
Focusing on quality,price and service is our permanent commitment!

Enterprise production workshop



Hardware workshop




LED non-dust workshop



Assembly workshop



Electronic-workshop



Testing room



Conference room



LED CEILING MOUNTED

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen






CEILING MOUNTED
LED FIXTURE SERIES
LED 268B/LED 268C

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctn
LED268B-L8*2W	16W	80PCS	1500LM	L600*W75*H24	618*180*170	10
LED268B-L16*2W	32W	160PCS	2800LM	L1210*W75*H24	1218*180*170	10
LED268C-L8*2W	16W	88PCS	1200LM	L600*W75*H24	588*180*170	10
LED268C-L16*2W	32W	176PCS	2200LM	L1210*W75*H24	1188*180*170	10

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 180-240V-50/60Hz	≥0.5
CRI	Beam Angle	Housing	IP
≥ 70	≥ 120°	Alumnum(268B) Cold-rolled sheet(268C)	IP20



parts





LED CEILING MOUNTED

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen






CEILING MOUNTED
LED FIXTURE SERIES
LED 268A

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctn
LED268A-L8*3W	24W	120PCS	1700LM	L600*W110*H35	625*240*250	10
LED268A-L16*3W	48W	240PCS	3400LM	L1200*W110*H35	1225*240*250	10

LED Size	Color Temp	Input Voltage	Power Factor
2835	3000K-6000K	AC 180-240V-50/60Hz	≥0.5
CRI	Beam Angle	Housing	IP
≥70	≥160°	Aluminium	IP20

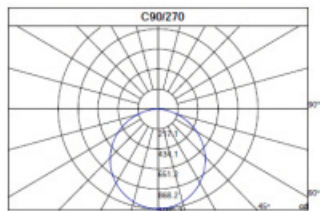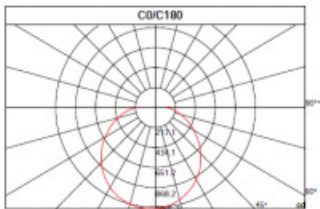

48W



LED FIXTURE

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen






CEILING MOUNTED
LED FIXTURE SERIES
LED 268H

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED268H-9W*3	27W	144PCS	2300LM	L615*W75*H25	640*320*180	20
LED268H-18W*3	54W	288PCS	4400LM	L1215*W75*H24	1235*320*180	20

LED Size	Color Temp	Input Voltage	Power Factor
2835	3000-6500K	AC 85-265V-50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
≥80	≥120°	Aluminium	IP20

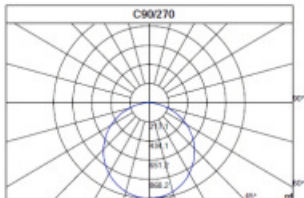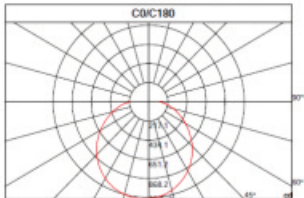

54W





LED CEILING MOUNTED

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





CEILING MOUNTED
LED FIXTURE SERIES
LED 228A


Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED228A-L8*2W	16W	80PCS	1500LM	L600*W131*H46	620*280*290	10
LED228A-L16*2W	32W	160PCS	3000LM	L1200*W131*H46	1220*280*290	10

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 100-240V-50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥130°	Cold-rolled sheet	IP20

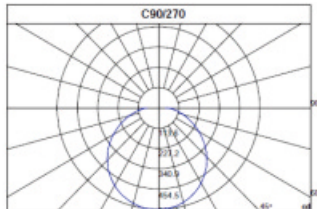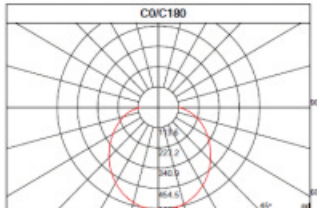

32W

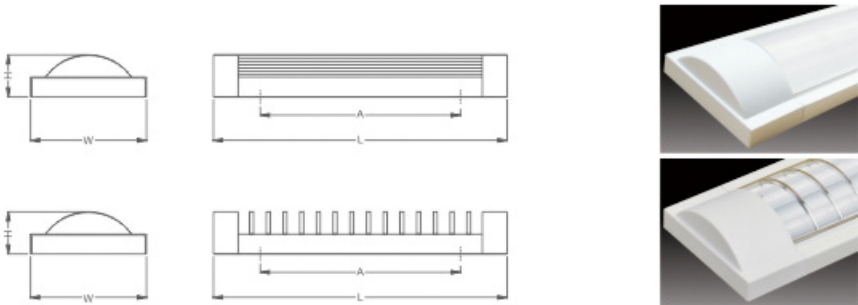



LED CEILING MOUNTED

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





CEILING MOUNTED
LED FIXTURE SERIES
LED 248


Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED248-L8*2W	16W	80PCS	1100LM	L692*W163*H52	720*370*185	6
LED228-L16*2W	32W	160PCS	2240LM	L1291*W163*H52	1320*370*185	6

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 100-240V-50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥110°	Cold-rolled sheet	IP20

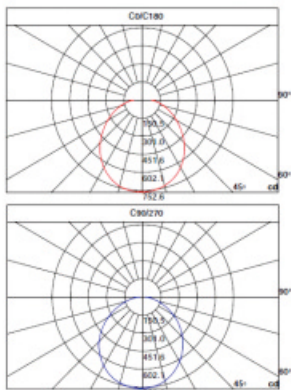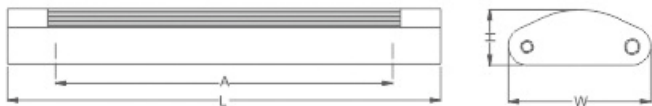

32W

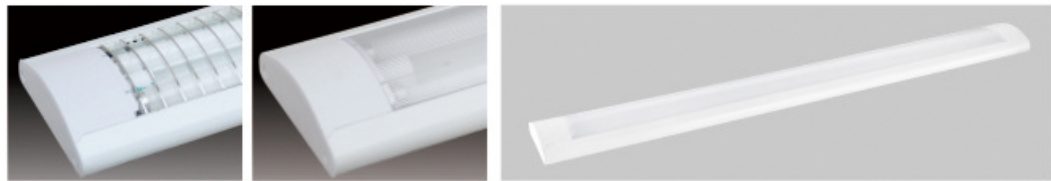



LED CEILING MOUNTED

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen







CEILING MOUNTED
LED FIXTURE SERIES
LED 528A

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED528A-L8*3W	24W	120PCS	1500LM	L596*W130*H62	625*425*150	6
LED528A-L16*3W	48W	240PCS	3300LM	L1196*W130*H62	1225*425*150	6

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 85-265V~50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥180°	Cold-rolled sheet	IP20

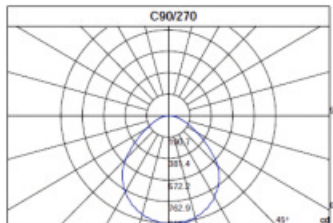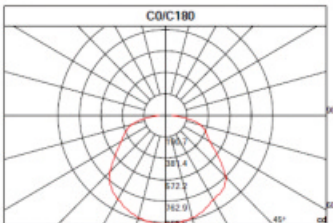

48W



LED CEILING MOUNTED

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





CEILING MOUNTED
LED FIXTURE SERIES
ZJ01

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
ZJ01-6W	4W	30PCS	540LM	L305*W23*H34	350*225*145	30
ZJ01-9W	9W	44PCS	810LM	L573*W23*H34	640*225*145	30
ZJ01-12W	12W	60PCS	1080LM	L873*W23*H34	930*225*145	30
ZJ01-18W	16W	80PCS	1620LM	L1173*W23*H34	1220*225*145	30

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 180-240V-50/60Hz	≥0.5/≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥160°	Aluminium	IP20

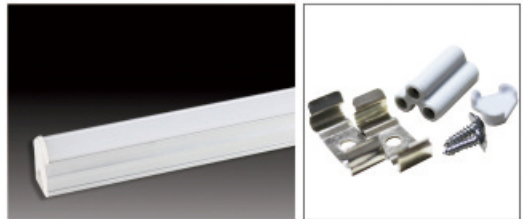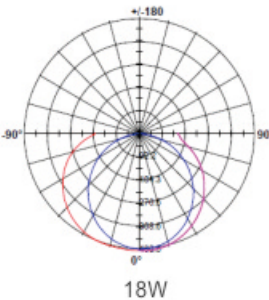

parts





LED PENDANT LIGHTING

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





LED PENDANT LIGHTING
FIXTURE SERIES
LED 608 SERIES

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED608 L9*2W	18W	96PCS	1200LM	L1175*W70*H37	1230*230*280	10
LED608E-20W	20W	40PCS	1400LM	L1175*W50*H40	1320*270*260	20
LED608E-30W	30W	60PCS	2100LM	L1175*W70*H40	1320*270*260	15
LED608E-40W	40W	80PCS	2800LM	L1175*W100*H40	1240*270*240	10

LED Size	Color Temp	Input Voltage	Power Factor
2835/5630	2700K/4000K/6500K	AC 180-240V-50/60Hz	≥0.5/≥0.9
CRI	Beam Angle	Housing	IP
> 70	≤120°	Aluminium	IP20

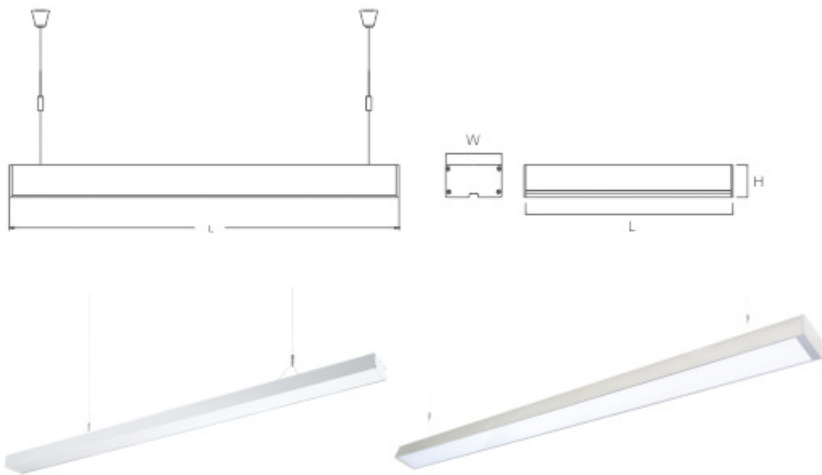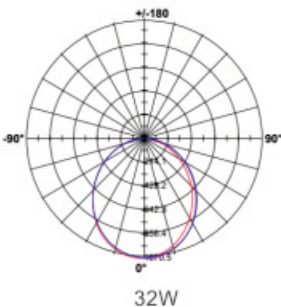



LED PENDANT LIGHTING

- Long life
- High color rendering
- High light
- Low temperature rise
- Eye protection
- No frequency screen





LED PENDANT LIGHTING
FIXTURE SERIES
LED 658A

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctn
LED658A-L8*3W	24W	120PCS	1500LM	L590*W180*H59	660*292*210	4
LED658A-L16*3W	48W	240PCS	3000LM	L1190*W180*H59	1260*292*210	4


LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 100-240V-50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥110°	Aluminium	IP20

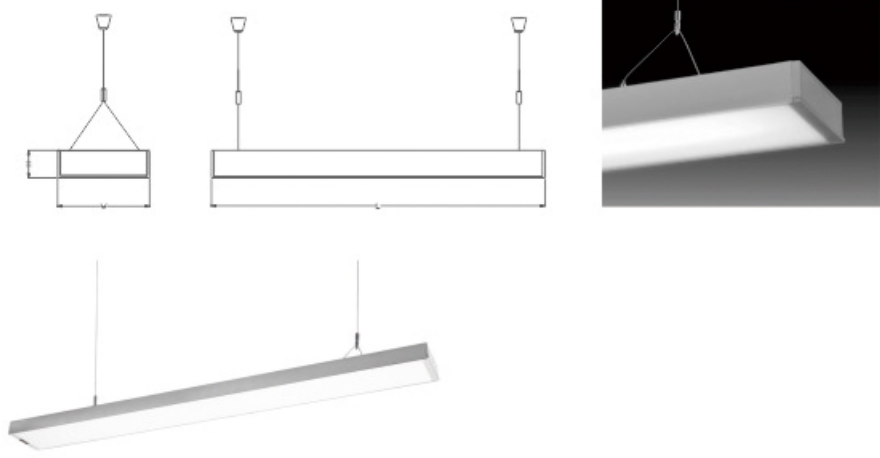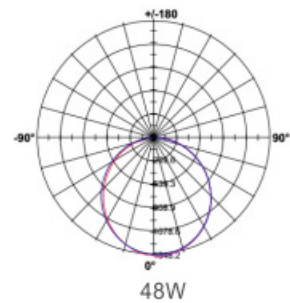



LED PENDANT LIGHTING

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen

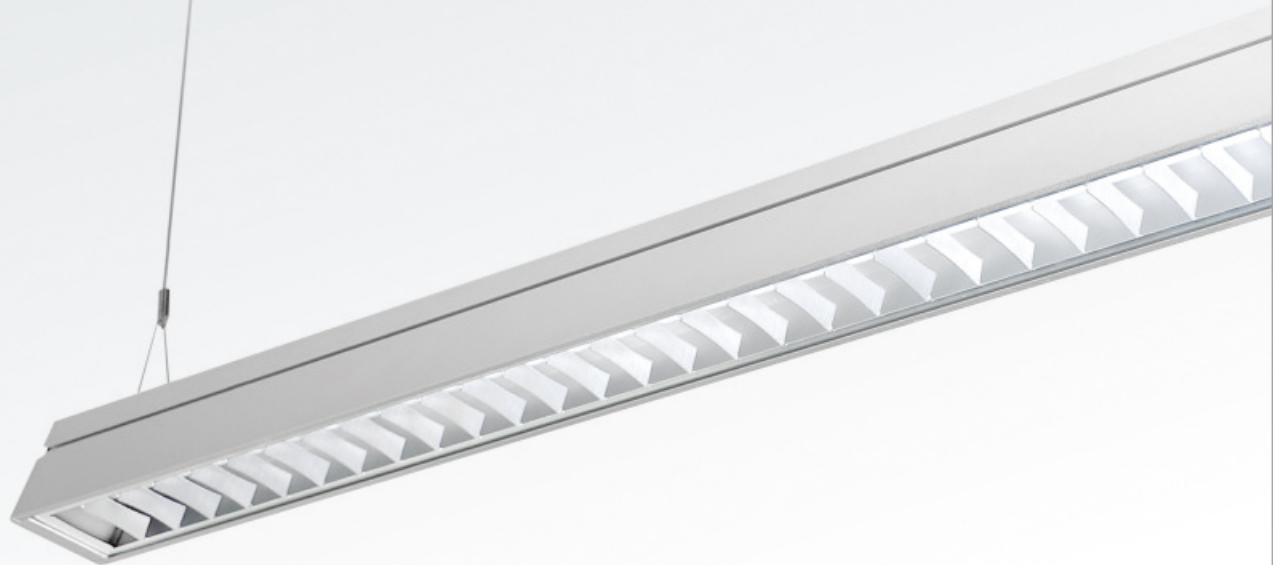



LED PENDANT LIGHTING
FIXTURE SERIES
LED 668

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED668-L16*2W	32W	160PCS	2200LM	L1200*W70*H82	1260*335*195	8

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 100-240V~50/60Hz	≥0.9

CRI	Beam Angle	Housing	IP
≥70	≥110°	Aluminium	IP20

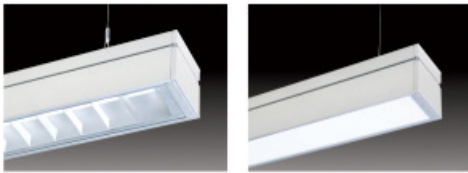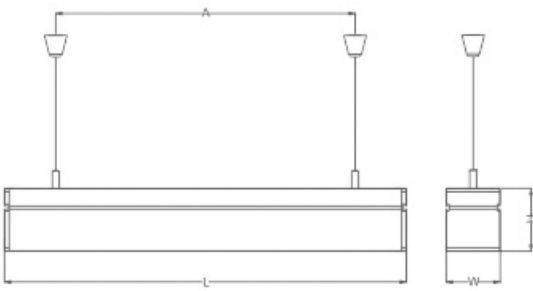



LED PENDANT LIGHTING

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen




LED PENDANT LIGHTING
FIXTURE SERIES
LED 802

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctn
LED802-48W	48W	240PCS	4100LM	L1180*W110*H60	1260*485*155	8

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 90-240V~50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥110°	Aluminium	IP20

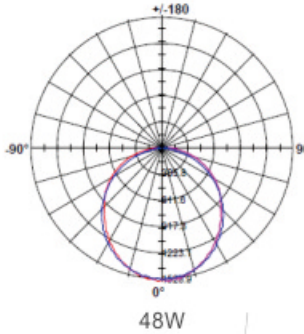

parts



LED PENDANT LIGHTING

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





LED PENDANT LIGHTING
FIXTURE SERIES
LED 508

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED508-16x2w	32W	160PCS	2150LM	L1190*W80*H80	1275*300*205	6

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 180-240V~50/60Hz	≥0.5
CRI	Beam Angle	Housing	IP
≥70	130°	Aluminium	IP20

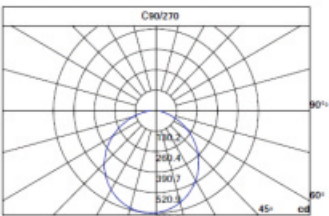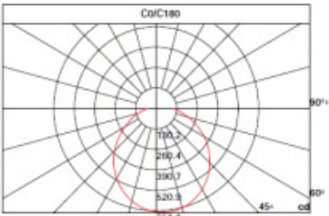

32W



LED CEILING MOUNTED

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen




CEILING MOUNTED
FIXTURE SERIES
LED 258

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED258-L9*2K	18W	96PCS	1350LM	L625*W69*H78	650*270*320	12
LED258-L18*2K	36W	192PCS	2850LM	L1190*W69*H78	1260*270*320	12

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 180-240V-50/60Hz	≥0.5/≥0.9

CRI	Beam Angle	Housing	IP
≥70	≥110°	Aluminium	IP20

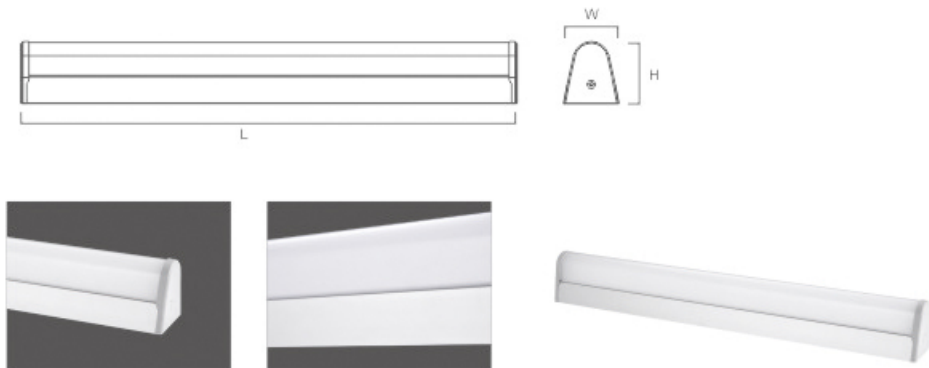



LED PENDANT LIGHTING

- Long life
- High color rendering
- High light
- Low temperature rise
- Eye protection
- No frequency screen





LED PENDANT LIGHTING
FIXTURE SERIES
LED 528B

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED528B-L14*3W	42W	240PCS	3300LM	L1194*W132*H50	1270*350*155	6

LED Size	Color Temp	Input Voltage	Power Factor
2835 0.2W	2700K/4000K/6500K	AC 180-240V-50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
> 70	≥120°	Aluminium	IP20

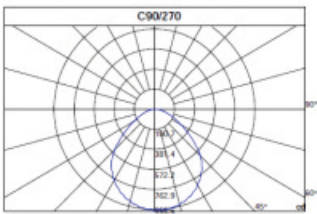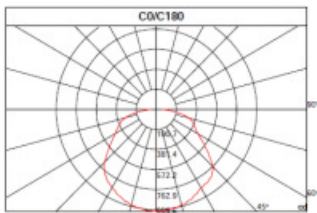

42W



LED PENDANT LIGHTING

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





LED PENDANT LIGHTING
FIXTURE SERIES
LED 638

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED638-L8*2W	16W	80PCS	1120LM	L584*W218*H35	655*290*250	6
LED638-L16*2W	32W	160PCS	2200LM	L1184*W218*H35	1255*290*250	6

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 100-240-50/60Hz	≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥110°	Aluminium	IP20

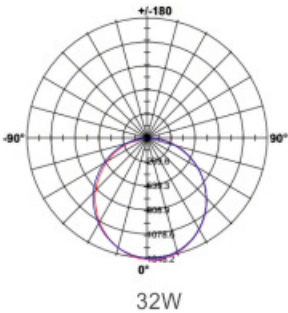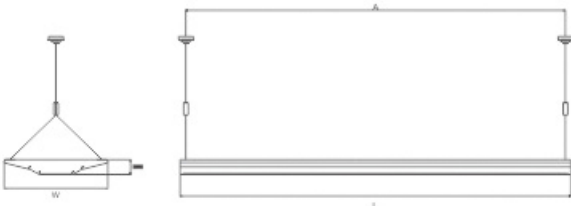



LED PENDANT LIGHTING

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen




LED PENDANT LIGHTING
FIXTURE SERIES
LED 648A

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED648A-L8*3SR	16W	120PCS	1500LM	L600*W250*H66	670*280*170	2
LED648A-L16*3SR	48W	240PCS	3000LM	L1200*W250*H66	1270*280*170	2

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 100-24V~50/60Hz	≥0.9

CRI	Beam Angle	Housing	IP
≥70	≥110°	Aluminium	IP20

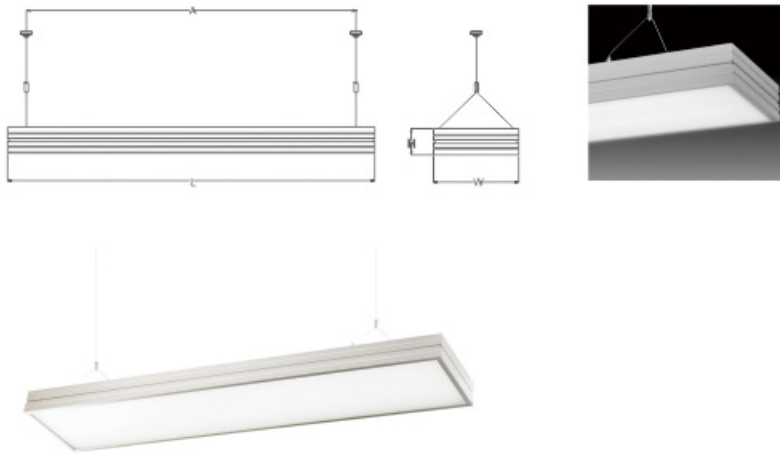



LED PENDANT LIGHTING

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen




LED PENDANT LIGHTING
FIXTURE SERIES
LED 688

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED688-L8*2W	16W	80PCS	900LM	L600*W200*H55	680*230*290	4
LED688-L16*2W	32W	160PCS	1800LM	L1200*W200*H55	1280*230*290	4
LED688-L16*3W	48W	240PCS	3000LM	L1200*W200*H55	1280*230*290	4

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 100-240V-50/60Hz	≥0.9

CRI	Beam Angle	Housing	IP
≥70	≥130°	Aluminium	IP20





LED CEILING MOUNTED
TRI-TROOF FIXTURE

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen



CEILING MOUNTED
ONLY CASING USE FOR LED TUBE
MX328

Product parameter

Model	Tube	Dimension(mm)	Master Carton(mm)	Qty/Ctn
MX328-Y20W	T8	L662*W87*H93	675*245*195	6
MX328-Y20x2W	T8	L663*W131*H90	675*285*255	6
MX328-Y40W	T8	L1262*W87*H93	1285*285*195	6
MX328-Y40x2W	T8	L1263*W131*H90	1285*285*255	6

Beam Angle	Housing	IP
≥ 160°	PC	IP65



parts





LED CEILING MOUNTED
TRI-TROOF FIXTURE

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen






CEILING MOUNTED
LED FIXTURE SERIES
LED 806

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
LED806-18x2W	36W	200PCS	2400LM	L1210*W68*H48	1260*310*160	6

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 85-265V~50/60Hz	≥ 0.5
CRI	Beam Angle	Housing	IP
> 70	≥ 160°	PC	IP65

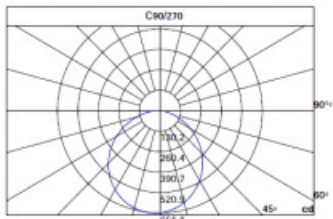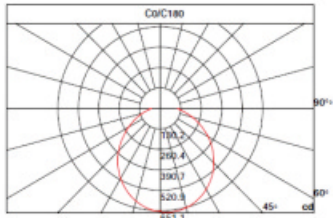


36W



LED TUBE

- Long life
- High color rendering
- High light
- Low temperature rise
- Eye protection
- No frequency screen


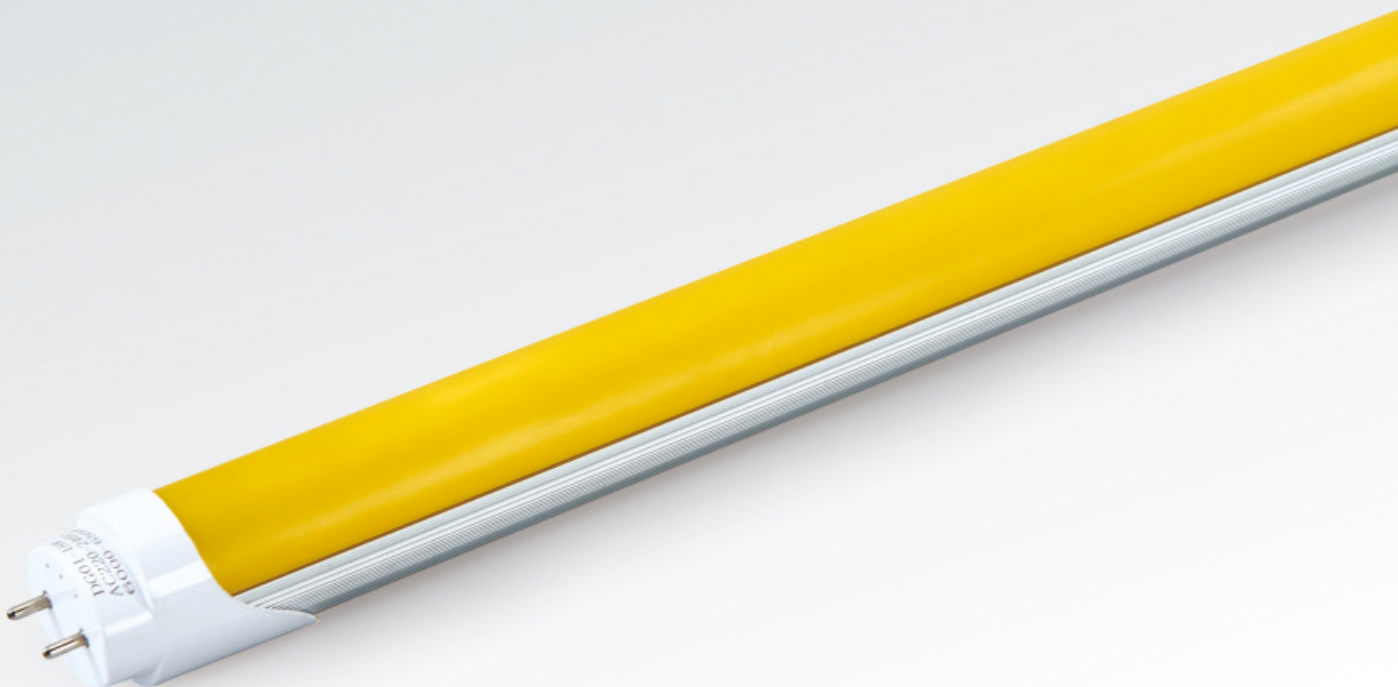


LED TUBE SERIES
DG01
ANTI UV TUBE

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
DG01-9W	9W	44PCS	≥810LM	L589*Φ26	630*185*165	25
DG01-18W	18W	96PCS	≥1620LM	L1199*Φ26	1250*185*165	25

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 180-240V-50/60Hz	≥0.5/≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥110°	Aluminium	IP20

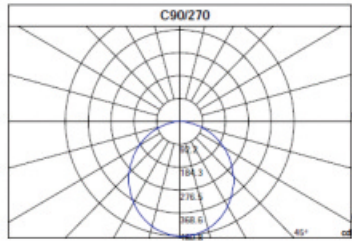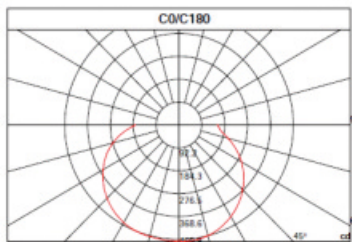

18W



LED TUBE

- Long life
- High color rendering
- High light
- Low temperature rise
- Eye protection
- No frequency screen




LED TUBE SERIES
DG03

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
DG03-14W	14W	48PCS	1400LM	L589*Φ26	630*190*170	25
DG03-27W	27W	96PCS	2700LM	L1199*Φ26	1235*170*190	25

LED Size	Color Temp	Input Voltage	Power Factor
5730	2700K/4000K/6500K	AC 180-240V~50/60Hz	≥0.5/≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥180°	Aluminium	IP20

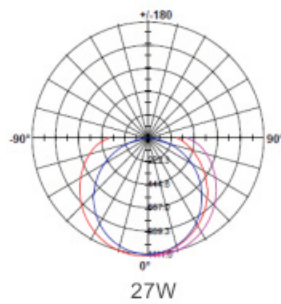



LED TUBE

- Long life
- High color rendering
- High light
- Low temperature rise
- Eye protection
- No frequency screen





LED TUBE SERIES
DG06

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctn
DG06-9W	9W	33PCS	900LM	L589*Φ26	630*180*180	25
DG06-18W	18W	66PCS	1800LM	L1199*Φ26	1240*180*180	25

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 180-240V~50/60Hz	≥0.5
CRI	Beam Angle	Housing	IP
≥70	≥180°	glass	IP20

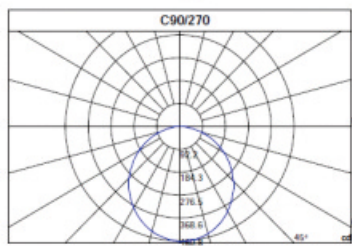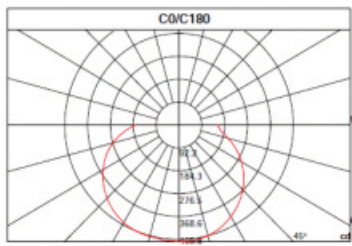

18W



LED TUBE

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen



LED TUBE SERIES

208K/Q

ONLY CASTING FOR LED TUBE

Product parameter

Model	Housing	Dimension(mm)	Master Carton(mm)	Qty/Ctn
MX208K-40AE2W	Cold-roued sheet	L1227*W40*H51	1245*212*150	30
MX208K-40BE2W	Cold-roued sheet	L1227*W121*H51	1245*212*150	25
MX208K-40x2AE2W	Cold-roued sheet	L1227*W72*H51	1245*212*150	30
MX208K-40x2BE2W	Cold-roued sheet	L1227*W121*H51	1245*212*150	25
MX208Q-Y40	Cold-roued sheet	L1220*W34*H44.5	1240*175*177	50





LED TROFFER LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





LED TROFFER LIGHT
SERIES
DP05

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
DP05-L11*3W	32W	168PCS	2600LM	L595*W595*L81	620*190*630	2
DP05-L24*3W	72W	360PCS	5500LM	L1195*W595*L81	1230*190*630	2

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 85-265V-50/60Hz	≥0.5/≥0.9

CRI	Beam Angle	Housing	IP
≥70	≥130°	Cold-rolled sheet	IP20

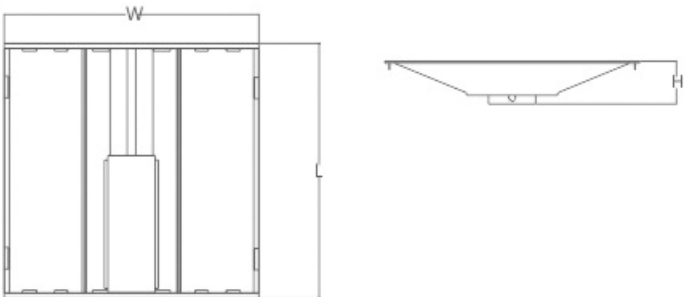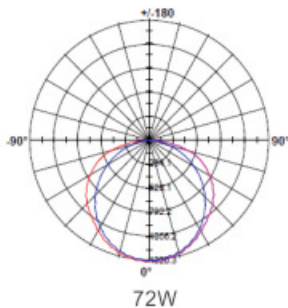



LED TROFFER LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen




LED TROFFER LIGHT
SERIES
DP02

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
DP02-L9*3W	27W	132PCS	1900LM	L600*W600*H52	640*640*255	4
DP02-L16*3W	48W	240PCS	3600LM	L1200*W600*H52	1240*640*130	2

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 85-265V-50/60Hz	≥0.5/≥0.9
CRI	Beam Angle	Housing	IP
≥70	≥130°	Cold-rolled sheet	IP20

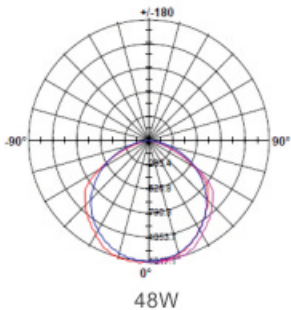



LED TROFFER LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen






LED TROFFER LIGHT
SERIES
DP03

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
DP03-L10*3W	30W	150PCS	2200LM	595*595	650*650*105	2

LED Size	Color Temp	Input Voltage	Power Factor
2835	3000K-6000K	AC 100-240V-50/60Hz	≥0.5
CRI	Beam Angle	Housing	IP
≥70	≥125°	Cold-rolled sheet	IP20

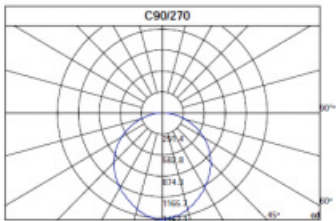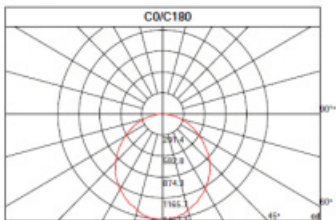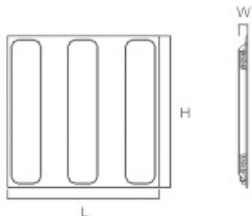

30W





LED TROFFER LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen





LED TROFFER LIGHT
SERIES
DP06


Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
DP06-L9*3W	27W	132	1900LM	L595*W595*H52	640*130*640	2
DP06-L16*3W	48W	240	3300LM	L1195*W595*H52	1240*130*640	2

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC 85-265V-50/60Hz	≥0.5/≥0.9
CRI	Beam Angle	Housing	IP
≥70/80	≥130°	Cold-rolled sheet	IP20

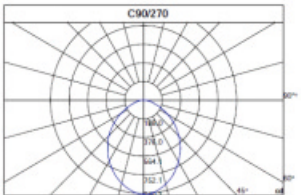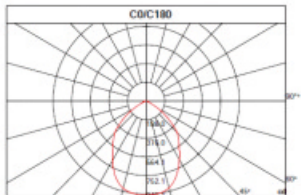

48W

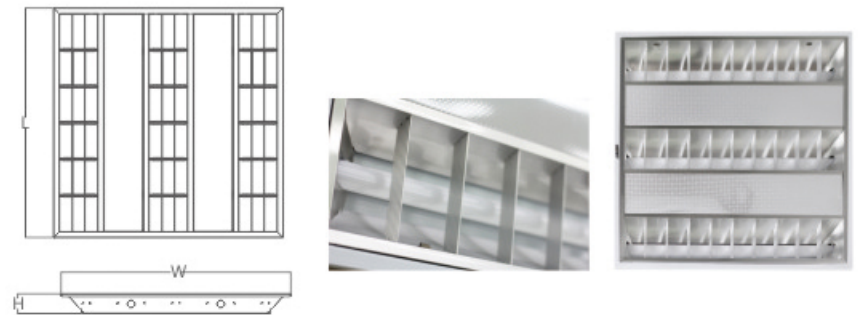



LED TROFFER LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection




LED TROFFER LIGHT
SERIES
DP07


Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
DP07-L3x14W	40W	210PCS	3000LM	L595*W595*H60	635*150*635	2

LED Size	Color Temp	Input Voltage	Power Factor
2835	3000K-6000K	AC180-240V~50/60Hz	≥0.5
CRI	Beam Angle	Housing	IP
> 80	≥130°	Cold-roued sheet	IP20

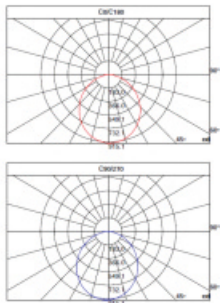

40W





LED TROFFER LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection



LED TROFFER LIGHT
SERIES

T8:MQ203\204\403\404

ONLY CASTING FOR LED TUBE

Product parameter

Model	light source	Dimension(mm)	Master Carton(mm)	Qty/Ctn
MQ203	T8	L595*W595*H80	650*640*190	2
MQ204	T8	L595*W595*H80	650*640*190	2
MQ403	T8	L1195*W595*H80	1260*640*190	2
MQ404	T8	L1195*W595*H80	1260*640*190	2





LED PANEL LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen



LED PANEL LIGHT
PB08

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton(mm)	Qty/Ctr
PB08-24W	24W	120PCS	1920LM	300X300	620*385*350	20
PB08-36W	36W	180PCS	2880LM	300x600	690*190*680	10
PB08-48WF	48W	240PCS	3840LM	595x595	675*200*660	5
PB08-48WC	48W	240PCS	3840LM	1195x295	1265*195*325	5
PB08-72WF	72W	360PCS	5760LM	595x595	675*200*660	5
PB08-72WC	72W	360PCS	5760LM	1200x600	1265*50*660	2

LED Size	Color Temp	Input Voltage	Power Factor
4014/2835	2700K-6500K	AC 85-265V~50/60Hz	≥0.5/≥0.9

CRI	Beam Angle	Housing	IP
≥ 80	≥180°	Aluminium	IP20





LED PANEL LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen




LED PANEL LIGHT
SERIES
TD24

Product parameter

Model	Power	Luminous Flux	Cutout(mm)	Dimension(mm)	Master Carton(mm)	Qty/ctn
TD24-3WY	3W	200LM	Φ 70	Φ 83*21		
TD24-6WY	6W	400LM	Φ 105	Φ 119.5*21		
TD24-9WY	9W	650LM	Φ 135	Φ 146.5*21		
TD24-12WY	12W	1000LM	Φ 155	Φ 168.5*21		
TD24-15WY	15W	1200LM	Φ 175	Φ 189.5*21		
TD24-18WY	18W	1400LM	Φ 205	Φ 220*21		
TD24-24WY	24W	2000LM	Φ 280	Φ 296.5*21		
TD24-3WF	3W	200LM	72*72	L84*W84*H21		
TD24-6WF	6W	420LM	105*105	L118*W118*H21		
TD24-9WF	9W	650LM	135*135	L148.5*W148.5*H21		
TD24-12WF	12W	980LM	155*155	L167*W167*H21		
TD24-15WF	15W	1200LM	175*175	L188.5*W188.5*H21		
TD24-18WF	18W	1600LM	205*205	L219.5*W219.5*H21		
TD24-24WF	24W	2000LM	280*280	L295*W295*H21		

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700/4000/6500K	AC100-240V-50/60Hz	0.5/0.9
CRI	Beam Angle	Housing	IP
80	≥105°	Aluminium	IP40

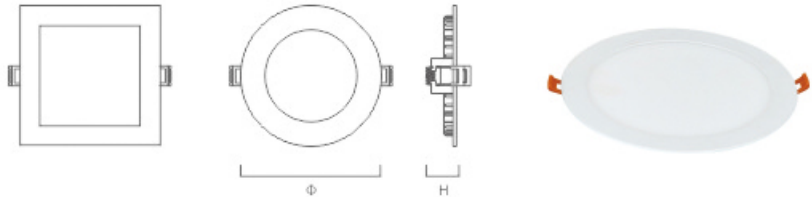



LED PANEL LIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen




LED SLIM PANEL LIGHT
SERIES
TD23

Product parameter

Model	Power	LEDs	Luminous Flux	Cutout(mm)	Dimension(mm)	Master Carton(mm)	Qty/Ctr
TD23-6WF	6W	32PCS	400LM	110*110	L120*W120*H20.5	330*280*360	40
TD23-12WF	12W	60PCS	900LM	155*155	L170*W170*H20.5	380*330*460	40
TD23-18WF	18W	100PCS	1350LM	210*210	L225*W225*H21	490*330*290	20
TD23-24WF	24W	120PCS	2000LM	285*285	L300*W300*H21	330*330*370	10
TD23-6WY	6W	32PCS	400LM	Φ 110	Φ 120*20.5	330*280*360	40
TD23-12WY	12W	60PCS	850LM	Φ 115	Φ 170*20.5	380*330*460	40
TD23-18WY	18W	100PCS	1550LM	Φ 210	Φ 225*20.5	490*330*290	20
TD23-24WY	24W	120PCS	2150LM	Φ 285	Φ 300*21	330*330*370	10

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700/4000/6500K	AC100-240V-50/60Hz	0.5/0.9
CRI	Beam Angle	Housing	IP
80	≥105°	Aluminium	IP40

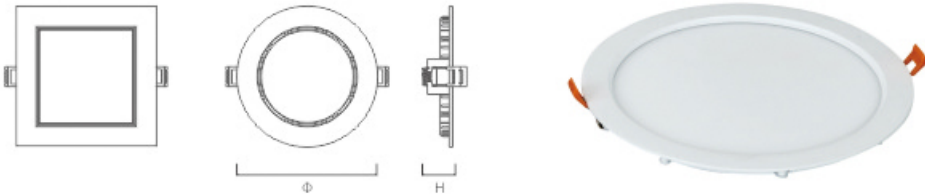



LED DOWNLIGHT

Long life
High color rendering
High light
Low temperature rise
Eye protection
No frequency screen



LED DOWNLIGHT
SERIES
TD18

Product parameter

Model	Power	LEDs	Luminous Flux	Dimension(mm)	Master Carton (mm)	Qty/Ctr
TD18-7W	7W	42PCS	450LM	Φ 101*36	625*280*530	100
TD18-12W	12W	72PCS	1100LM	Φ 126*36	610*340*510	80
TD18-15W	15W	90PCS	1400LM	Φ 154*36	540*380*510	60
TD18-18W	18W	108PCS	1800LM	Φ 177*36	510*410*430	40

LED Size	Color Temp	Input Voltage	Power Factor
2835	2700K/4000K/6500K	AC85-265V~50/60Hz	0.5
CRI	Beam Angle	Housing	IP
≥80	≥100°	PPT&Glass fiber	IP40

